

# RATCHET WRENCHES



18 FT - LBS

Slim profile head Ergonomic composite housing



6-3/4"  
Check & Compare!  
25 FT - LBS



15 FT - LBS

Slim profile head Ergonomic composite housing



6-3/4"  
Check & Compare!  
25 FT - LBS

## 1/4" DRIVE Standard Duty

RW250B 400005

- Compact lightweight design allows work in confined spaces
- Very fast 240 R.P.M. head accomplishes nut running far quicker than by hand
- Reaches areas air impacts can't
- Ball type socket retainer allows quick socket changes
- Ideal for running small fasteners and light duty general repair work
- **MAXIMUM TORQUE: 18 FT - LBS**

## 1/4" DRIVE "MINI" Heavy Duty

RW25HDM 400007

- Our most powerful & compact 1/4 "mini" ratchet
- Slim profile head ideal for engine compartment & under-dash work
- Contoured composite housing cover with traction pad for maximum operator comfort and control
- Fully recessed throttle for easy grip
- Longer service life provided by roll forged pawl to limit spreading and special heat treating and precision machining of all components
- A professional tool for the professional user
- **MAXIMUM TORQUE: 25 FT - LBS**

## 3/8" DRIVE "MINI" Standard Duty

RW375M 400152

- This "mini" ratchet wrench allows work in tight spaces where standard ratchet wrenches can't fit
- Ball type socket retainer allows quick socket changes
- Intake screen protects motor for extended life
- An excellent addition to any shop for running small fasteners
- **MAXIMUM TORQUE: 15 FT - LBS**

## 3/8" DRIVE "MINI" Heavy Duty


RW38HDM 400113

- Same great features as RW25HDM in a 3/8 "mini" ratchet
- **MAXIMUM TORQUE: 25 FT - LBS**

MOD. NO. PROD. NO.	RW250B 400005	RW25HDM 400007	RW375M 400152	RW38HDM 400113
-----------------------	------------------	-------------------	------------------	-------------------

Square Drive	1/4"	1/4"	3/8"	3/8"
Max. Torque by Hand (Ft.- Lbs.)	—	70	—	70
Working Torque (Ft. - Lbs.)	18	25	15	25
Free Speed R.P.M.	240	250	250	250
Standard Bolt Capacity	5/16"	3/8"	5/16"	3/8"
Overall Length	8-3/4"	6-3/4"	7-1/2"	6-3/4"
Weight (Lbs.)	1.10	1.15	1.18	1.15
Avg. Air Consumption (CFM)	3	2.55	2.5	2.55
Min. Hose Size	5/16"	3/8"	1/4"	3/8"
Air Inlet NPT	1/4"	1/4"	1/4"	1/4"
Sound Pressure (dBA)	—	89.1	—	89.1
Vibration (M/S <sup>2</sup> )	—	2.32	—	2.32

- **FOR MAXIMUM PERFORMANCE WE RECOMMEND 90 LB PSI AIR PRESSURE**

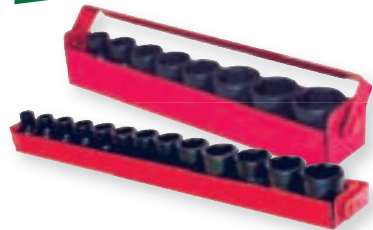

## 3/8" DRIVE POWER SOCKETS

Featuring Torque-Drive™ power socket design.  
Please consult our Hand Tools catalogue for range and specifications.

# RATCHET WRENCHES

## 3/8" DRIVE Standard Duty

RW375X **400108**

- JET's most popular air ratchet
- Improved ratchet head assembly and motor design results in powerful torque output
- Fast 150 R.P.M. head
- Ball type socket retainer allows quick socket changes
- Intake screen protects motor for extended life
- Ideal for a variety of automotive applications including exhaust system, water and fuel pump work, air conditioner, radiator and spark plug removal/replacement and general engine and body shop work
- **MAXIMUM TORQUE: 50 FT - LBS**



50 FT - LBS

Air outlet swivels 360° for operator convenience

360° swivel air inlet prevents hose twisting

## 3/8" DRIVE Heavy Duty

RW375HD **400109**

- This professional quality, heavy duty ratchet wrench features a high performance five blade motor, producing 70 ft/lbs of torque. It is our most powerful ratchet wrench
- 360° swivel air inlet prevents twists in the hose for improved tool handling
- Ergonomic handle, with insulating and vibration absorbing rubber cover, for operator comfort and control
- Fully recessed throttle for easy grip
- Air outlet swivels 360° allowing exhaust to be directed away from the operator
- Slim, low profile ratchet head & long neck design permits better access in tight work areas
- Longer service life provided by roll forged pawl to limit spreading and special heat treating and precision machining of all components
- **MAXIMUM TORQUE: 70 FT - LBS**



70 FT - LBS

Insulated ergonomic handle & trigger

## 1/2" DRIVE Standard Duty

RW500X **400213**

- Same high quality features as model RW375X except the anvil is 1/2" drive
- **MAXIMUM TORQUE: 50 FT - LBS**



50 FT - LBS

Air outlet swivels 360° for operator convenience

360° swivel air inlet prevents hose twisting

## 1/2" DRIVE Heavy Duty

RW500HD **400214**

- Same high quality features as model RW375HD except the anvil is 1/2" drive
- **MAXIMUM TORQUE: 70 FT - LBS**



70 FT - LBS

Insulated ergonomic handle & trigger

MOD. NO.	RW375X	RW375HD	RW500X	RW500HD
PROD. NO.	400108	400109	400213	400214

Square Drive	3/8"	3/8"	1/2"	1/2"
Max. Torque by Hand (Ft.- Lbs.)	—	120	—	120
Working Torque (Ft. - Lbs.)	50	70	50	70
Free Speed R.P.M.	150	160	150	160
Standard Bolt Capacity	3/8"	3/8"	3/8"	3/8"
Overall Length	10-1/4"	11-3/4"	10-1/4"	11-3/4"
Weight (Lbs.)	2.46	2.8	2.46	2.8
Avg. Air Consumption (CFM)	4	2.6	4	2.6
Min. Hose Size	3/8"	3/8"	3/8"	3/8"
Air Inlet NPT	1/4"	1/4"	1/4"	1/4"
Sound Pressure (dBA)	—	90.8	—	90.8
Vibration (M/S <sup>2</sup> )	—	1.93	—	1.93

- **FOR MAXIMUM PERFORMANCE WE RECOMMEND 90 LB PSI AIR PRESSURE**

JET Accessories



## 3/8" DRIVE DEEP POWER SOCKETS

Featuring Torque-Drive™ power socket design. Please consult our Hand Tools catalogue for range and specifications.