



HEAVY DUTY

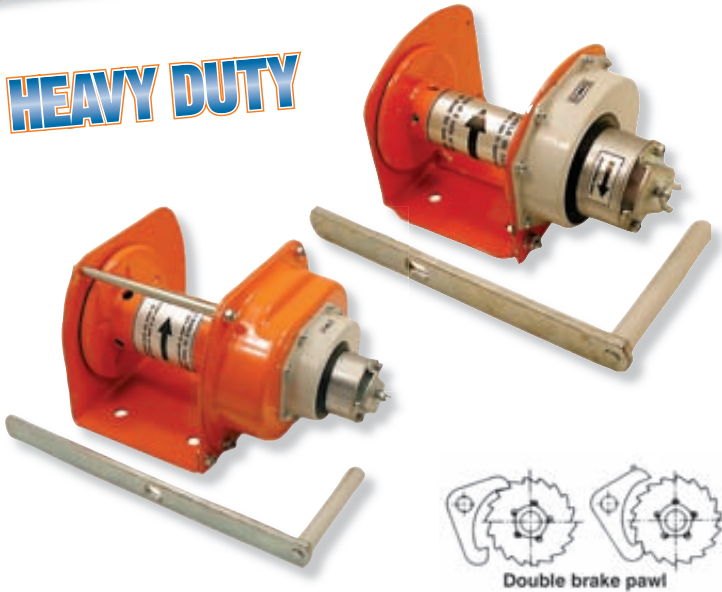

WINCHES

JET INDUSTRIAL WINCHES


- Free wheeling feature enables the operator to pay out cable fast with no load attached
- Will not free wheel under load
- Safe and dependable braking system includes a double-tipped brake pawl ensuring that either tip is always engaged under all conditions
- Non-asbestos brake discs using a high quality low abrasion aramid fibre material for a safer and healthier environment
- Dust and weather-tight housing using an ABS plastic cover to seal out dust and rain
- All braking components are plated with a rust resistant finish
- Handle grip is designed to allow maximum comfort during winding
- Handle length is easily adjustable

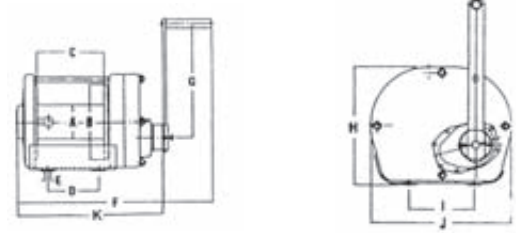

PROD. NO.	MOD. NO.	Rated Lifting Cap'y (lbs)	Drum Cap'y	Overall Dim. (L x W x H) (in)	Cable Length Pulled per Turn (in)	Force Req'd To Lift Cap'y (lbs)	Handle Length (in)	Gear Ratio	Ship Wt. (lbs)
113261	IWF-100N	220	5/32" x 131"	10-7/8 x 6-5/16 x 5-13/16	6-1/2	26	9-13/16	1:1	16
113262	IWF-300N	551	3/16" x 131"	14-1/4 x 8-11/16 x 6-7/8	2-7/8	20	13-3/4	2.88:1	27
113263	IWF-500N	882	1/4" x 98"	14-1/4 x 9-11/16 x 7-3/16	2-3/16	25	13-3/4	4.33:1	30
113264	IWF-1000N	1,653	5/16" x 98"	15-7/8 x 10-1/2 x 8-7/16	1	22	13-3/4	12.2:1	43
113265	IWF-2000N	2,425	3/8" x 98"	17-5/8 x 11-13/16 x 9-1/8	11/16	22	13-3/4	22.2:1	67
113266	IWF-3000N	3,748	1/2" x 66"	20-1/16 x 14-1/4 x 11-11/16	5/8	33	13-3/4	28.8:1	101

DIMENSIONS IN INCHES

MOD. NO.	A	B	C	D	E	F	G	H	I	J	K
IWF-100N	1-7/8	4-1/32	4-11/16	3-1/4	7/16	15-15/16	9-13/16	5-51/64	3-35/64	6-19/64	9-5/8
IWF-300N	2-3/8	4-59/64	5-29/32	3-15/16	19/32	19-13/64	13-3/4	6-55/64	5-1/8	8-43/64	12-15/16
IWF-500N	2-3/4	5-33/64	5-29/32	3-15/16	19/32	19-13/64	13-3/4	7-11/64	5-1/8	9-21/32	12-15/16
IWF-1000N	3-1/2	6-57/64	6-7/64	4-21/64	45/64	20-53/64	13-3/4	8-7/16	6-45/64	10-31/64	14-9/16
IWF-2000N	4-3/8	7-31/64	7-11/16	6-7/64	45/64	22-37/64	13-3/4	9-3/32	6-45/64	11-13/16	16-5/16
IWF-3000N	5-1/2	9-1/16	8-5/64	6-7/64	45/64	24-63/64	13-3/4	11-21/32	6-45/64	14-17/64	18-23/32

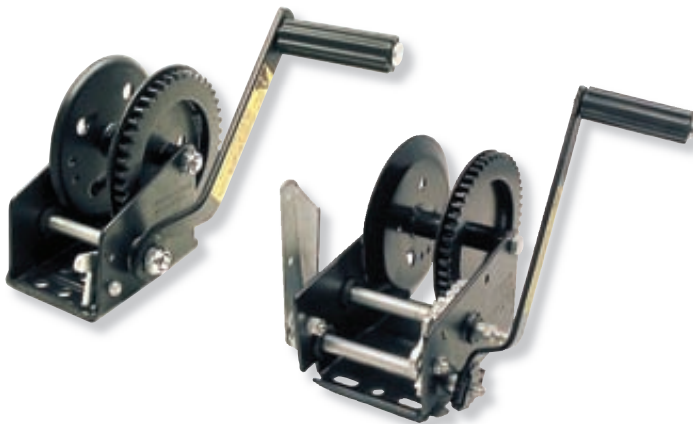

JET GENERAL PURPOSE WINCHES

- Galvanized winches are coated with "Posi-Glaze," an oven cured epoxy providing exceptional resistance to rust, salt and chemical corrosion
- One piece pinion gear and shaft design eliminates gear to shaft bonding failures
- Oil impregnated bearings ensure smooth operation
- High tensile alloy steel is used for all shafts and gears
- Frames are embossed for extra strength
- Ideal for a wide range of applications such as industrial, automotive, agri-motive, marine and construction

PROD. NO.	MOD. NO.	Load Cap'y (lbs)	Gear Ratio	Hub Diam.	Reel Cap'y - Rope	3/8"	7/16"	1/2"	Reel Cap'y Net - Cable	1/8"	3/16"	Ship Wt. (lbs)	Wt. (lbs)
113106	GPW-1200	1,200	4.2:1	3/4"	50'	25'	20'	-	200'	90'	6	7	
113107	GPW-2500	2,500	5.1:1/12.2:1	1"	-	50'	35'	30'	-	170'	14	15	